

KX

Signal Light

c **UL** [®] US

Xenon



ø100

IP55 With SZ-200A



Optional
Rubber Gasket
SZ-200A


Xenon Signal Light featuring superior night-time visibility and adjustable flashing cycle.

- Newly Developed Prism Cut Lens: For bright illumination and improved visibility from all directions.
- Extended Bulb Life: Shock resistant xenon, even under severe vibration.
- Installation: Upright, inverted and sideways for indoors only.
- Main Body: Impact and heat resistant ABS resin.
- Lens: Superior impact and heat resistant polycarbonate resin for superior durability and light transmission.
- Superior Visibility: Intensive flashing using a xenon lamp (night-time visibility: 1,000m or more).
- Flashing Cycle: Adjustable between 30~90 times/minute.
- IP55 with the optional Rubber gasket SZ-200A (IP23 without SZ-200A).
- Available Colors: Red, Amber, Green, Blue.


Available by Special Order

- Silver Color Body.
- UL type (E215660).

Dimensions



Mounting Dimension

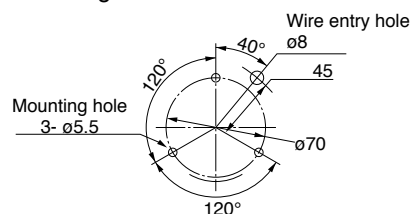

(mm)

KX Type

| Model | Rated Voltage | Power Consumption | Rush Current | Flashes per Minute |
|--------|---------------|-------------------|--------------|--------------------|
| KX-12 | 12V DC | 8W | — | 30~90 |
| KX-24 | 24V DC | | — | |
| KX-100 | 100V AC | 4W | 10A | |
| KX-120 | 120V AC | | 21A | |
| KX-220 | 220V AC | | | |
| KX-230 | 230~240V AC | | | |

Inrush current of this product is very high. Please check the outer contact capacity.